

REV Diffuser Installation Guide

Thank you for choosing the REV Diffuser to solve your air draft problems once and for all!

We hope you enjoy our problem solver! Please take a minute to let us know what you think on Facebook, LinkedIn, Google+ or on our website at REV-HVAC.com

1. CUT

Use a sharp knife to cut a hole the size of your duct*. Circles are pre-scored for standard diameters to facilitate your work.




2. PLUG

Install the Start Collar, then connect the collar to the duct. Make sure the connection is air tight.

Note: for enhanced performance, avoid duct kinks and angles as much as possible. We recommend using FlexRight with REV Diffusers.

(Optional) SECURE

The REV Diffuser has 8 easy attachment points - or anti-seismic tabs - to secure the product to the building structure.

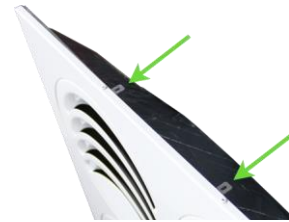


3. ADJUST

The REV Diffuser is factory setup for 360° swirl diffusion.



Rotate each sector clockwise to adjust at the desired angle. Counter-clockwise stoppers make it easier to setup the diffuser for 1 Way, 2 Way, 3 Way or 4 Way diffusion.

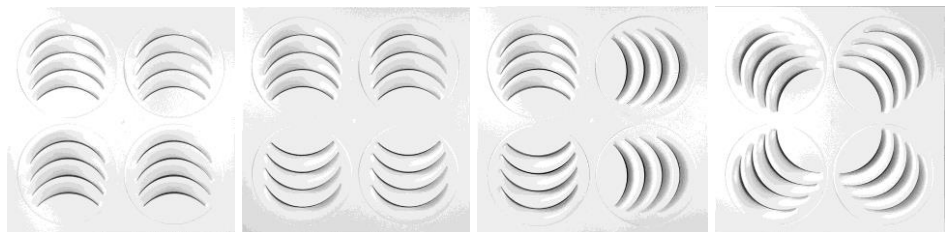

*Note: It is highly recommended to cover the edges whenever you cut into fiberglass. For optimal security and aesthetics, we recommend using certified black duct butter or certified black duct tape.



REPLACEMENT'S EVOLUTION